



**TOE-MI Series  
Heat transfer pumps  
for heat transfer oils up to 330 °C**

**With magnetic coupling in close coupled version  
Volute casing in inline design  
Hydraulic power ratings in acc. with EN 733**

**Volute casing PN 16  
Bearing bracket 360**

## TOE-MI

Heat transfer pumps with magnetic coupling in inline design

### TOE-MI Series

#### Heat transfer pumps for heat transfer oils up to 330 °C

With magnetic coupling in close coupled version

Volute casing in inline design

Hydraulic power ratings are in acc. with EN 733

Volute casing PN 16, bearing bracket 360



### Usage

Pumps of the TOE-MI series are designed for the transportation and recirculation of organic liquids on mineral oil or synthetic basis in heat transfer plants in acc. with DIN 4754. Special versions for eutectic mixtures upon request.

They are suitable for clean media to be pumped which do not chemically attack the pump materials used.

### Main applications

The pumps are mainly used in the following industrial sectors:

- Tempering in the plastics and die cast industry
- Baking ovens, large frying units as well as in the production of edible oil and dry mass for the food and feedstuff industries
- Heating of calenders and melting pots in the leather and rubber industry
- Heating of agitator and mixing tanks for the processing of colours, paints and lacquers
- Heating of tanks on stationary and FPSE platforms as well as in tank vessels
- Heating of press lines in the wood and pulp industry
- Flat glass production
- Solar power stations & ORC processes

### Index

|   |    |
|---|----|
| Usage .....                                 | 2  |
| Main applications .....                     | 2  |
| Operating data .....                        | 3  |
| Denomination .....                          | 3  |
| Design details .....                        | 4  |
| Accessories .....                           | 5  |
| Tests .....                                 | 5  |
| Painting .....                              | 5  |
| Performance curves 50 Hz .....              | 6  |
| Performance curves 60 Hz .....              | 7  |
| Pump dimensions .....                       | 8  |
| Cross-sectional drawings.....               | 10 |
| Interchangeability of pump parts .....      | 11 |
| Dimensional drawings .....                  | 12 |
| Pump data sheet .....                       | 13 |
| Substance data of heat transfer media ..... | 14 |

## Operating data

- Flow rate up to approx. 100 m<sup>3</sup>/h
- Total heads up to approx. 50 m
- Max. operating temperatures up to + 330 °C  
(Special versions for eutectic mixtures up to + 400 °C upon request.)

### Standard conditions at site

- Relative humidity during continuous operation max. 55%
- Ambient temperature up to + 40 °C
- Permissible altitude up to 1000 m above sea level

Deviations from the site conditions specified herein must already be disclosed in the inquiry.

### Flow rate

The permissible operating range of centrifugal pumps depends on diverse factors such as

- impeller shape
- speed
- type of liquid
- viscosity
- bearing load
- heat dissipation - particularly with regard to insulated volute casings
- clearance between the net positive suction head of the plant and the pump
- size of magnet coupling

The hydraulic operating range applicable to the TOE-MI series is indicated in the individual performance curves and the pump data sheet.

### Pump outlet pressure

The pump outlet pressure at the outlet nozzle depends on

- the pump inlet pressure
- the maximum total head of the selected impeller diameter
- the density of the medium to be pumped

The maximum pump outlet pressure  $p_{2\max op}$  is calculated using the formula:

$$p_{2\max op} = p_{1\max op} + \rho \cdot g \cdot H \cdot 10^{-5}$$

With:

$p_{2\max op}$  = maximum pump outlet pressure [bar]

$p_{1\max op}$  = maximum pump inlet pressure [bar]

$\rho$  = density of the medium to be pumped [kg/m<sup>3</sup>]

$g$  = gravitation constant [m/s<sup>2</sup>]

$H$  = maximum total head at zero flow or at the peak of the pump's characteristic curve at the selected impeller diameter [m]

Pumps must be selected and operated in a way which ensures that the maximum pump outlet pressure does by no means exceed the maximum permissible operating pressure of the casing  $p_{all w c}$  at operating temperature.

This also applies to commissioning while the discharge valve is closed (refer to Fig. 1).

### Pressure and temperature limitations

The maximum casing operating pressure  $p_{all w c}$  of the volute casing and the casing cover depends on the operating temperature:

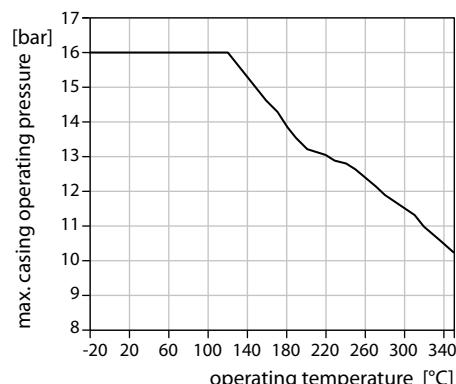


Fig. 1: Maximum permissible casing operating pressure  $p_{all w c}$

### Speeds

The operating speed of the pump shaft must not exceed the maximum permissible peripheral speed of the impeller, which corresponds to 48 m/s.


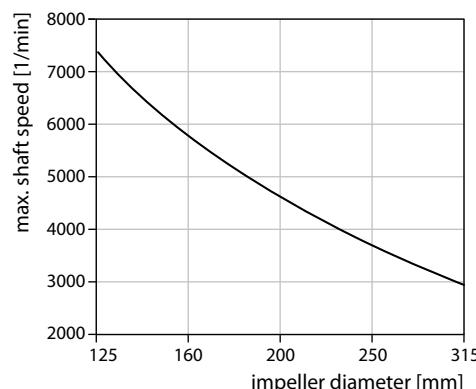


Fig. 2: Maximum permissible shaft speed

## Denomination

The denomination of a centrifugal pump of the TOE-MI series with bearing bracket is illustrated in the following example:

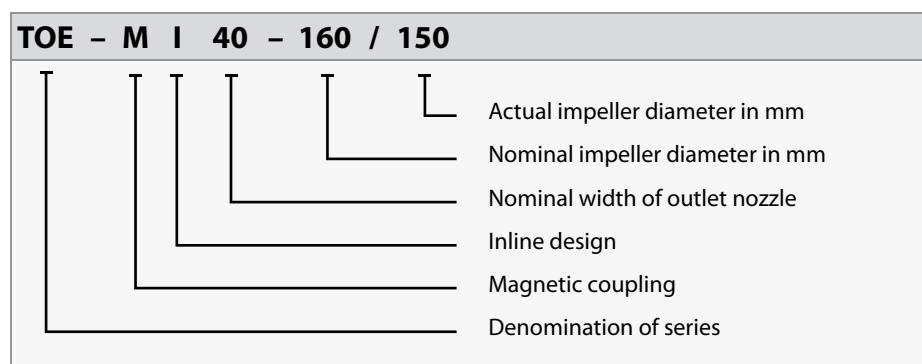

## TOE-MI

Heat transfer pumps with magnetic coupling in inline design

### Design details

Pumps of the TOE-MI series are magnetically-coupled horizontal or vertical, single-stage, single-entry centrifugal pumps with volute casing, radial inlet and radial outlet in process design (disassembly of the plug-in unit while the volute casing remains in the conduit).

The hydraulic power ratings and all dimensions are in accordance with EN 733, 1995 issue.

The tolerances of the mating dimensions are subject to the EN 735 standard.

### Allocation of components

Pumps of this series are part of a modular system, whose components can also be used for other pump series.

The complete plug-in unit including the impeller is used in the following series:

TOE-MN - base plate pumps with volute casing featuring axial inlet

TOE-MA - close coupled pumps with volute casing featuring axial inlet

TOE-MI - close coupled pumps with volute casing in inline design

For the parts allocation, refer to page 11.

### Materials

|                |                                  |                               |
|----------------|----------------------------------|-------------------------------|
| Volute casing  | EN-GJS-400-15                    | EN-GJS-400-18-LT              |
| Casing cover   | Spheroidal graphite cast iron    | Spheroidal graphite cast iron |
| Impeller       | EN-GJL-250                       | Cast iron                     |
| Bracket        | EN-GJS-400-15                    | EN-GJS-400-18-LT              |
| Bracket        | Spheroidal graphite cast iron    | Spheroidal graphite cast iron |
| Bearing casing | EN-GJL-250                       | Cast iron                     |
| Shafts         | 1.4122                           |                               |
| Shafts         | CrMo-steel                       |                               |
| Plain bearing  | S SiC                            |                               |
| Magnets        | Sm <sub>2</sub> Co <sub>17</sub> |                               |
| Separating can | 1.4571                           | 2.4610                        |
| Separating can | CrNiMo-steel                     | NiCo-alloy                    |

EN-GJS-400-15 = EN-JS1030 = GGG-40  
 EN-GJS-400-18LT = EN-JS-1025 = GGG-40.3  
 EN-GJL-250 = EN-JL1040 = GG-25

Tab. 1: Materials

### Volute casing

The nominal pressure of the volute casing is PN 16.

The outlet and inlet nozzles are fitted with bosses to allow for the subsequent connection of pressure gauges. These ports are only drilled upon request of the customer.

The volute casings are self-venting and may be provided with a plugged drain (G 3/8) when positioned vertically.

### Nozzle positions and flanges

|                   |   |
|-------------------|---|
| Inlet nozzle      | radial to the bottom  |
| Outlet nozzle     | radial to the top   |
| Flange dimensions | EN 1092-2<br>(for the corresponding dimensions, refer to the dimension chart) |

Tab. 2 : Nozzle positions

### Plain bearing bracket

The plain bearing bracket consists of the casing cover, the plain bearing cartridge, the internal rotor and the separating can.

#### Casing cover

The casing cover accommodates the plain bearing cartridge and the separating can. Depending on the torque to be transferred, the design of the casing cover allows for the use of different magnetic coupling sizes.

#### Plain bearing cartridge

The plain bearing cartridge carries the internal rotor and consists of the plain bearing casing, the bearing bushings and the bearing sleeves, which support the radial load and the remaining axial thrust.

#### Internal rotor

The internal rotor consists of the impeller, the shaft and the internal magnetic rotor. Most of the axial forces generated during operation are hydraulically compensated by the impeller.

Via a flow control system, the internal magnetic rotor is continuously cooled with the medium to be pumped to dissipate the heat additionally generated during operation by eddy current, viscosity and bearing friction loss. This way, light ends are prevented from accumulating in the area of the magnetic drive and the plain bearings.

The internal rotor is equipped with a start-up safety device, preventing the separating can from being internally destructed by the rotor in case of a plain bearing failure.

### Separating can

Together with the casing cover and the volute casing, the separating can hermetically seals the part of the pump which is in contact with the media to be pumped.

### Plug-in unit

= plain bearing bracket + impeller  
The plain bearing bracket and the volute casing form the pump part which is in direct with the medium.

### External rotor

The external rotor consists of the shaft and the external magnetic rotor. It transfers the torque exerted by the drive via the magnetic coupling to the internal rotor.

The external rotor is equipped with a start-up safety device, preventing the separating can from being externally destructed by the rotor in case of a ball bearing failure.

### Magnetic coupling


The magnetic coupling consists of the following components:

- internal magnetic rotor
- separating can
- external magnetic rotor

Four different coupling sizes with different magnetic lengths are available.

The transferable torques range between 10 and 500 Nm at ambient temperature.

Designation example of a magnetic coupling:

|   |   |
|---|---|
| <b>135 - 70</b>   |   |
|  | Magnetic length (mm)                    |
|  | Nominal magnetic coupling diameter (mm) |

Allocation of the magnetic coupling sizes to be used for the different pump sizes:

| Sizes | Nominal impeller diameter in mm  |                |     |
|-------|----------------------------------|----------------|-----|
|       | 160                              | 200            | 250 |
|       | possible magnetic coupling sizes |                |     |
| 32    | -                                | -              | -   |
| 40    | 75 / 110                         | 75 / 110       | -   |
| 50    | -                                | 75 / 110 / 135 | -   |
| 65    | -                                | 75 / 110 / 135 | -   |
| 80    | -                                | -              | -   |

Each magnetic coupling is sized individually by means of an EDP sizing program.

### Bracket

In its function as variant carrier of the different pump types TOE-MN, TOE-MA and TOE-MI, the bracket accommodates on one side the inner part and, on the other side, the outer part of the pump. The bracket is provided with radial cooling slots, which support the heat dissipation in the area of the magnetic coupling.

### Utility connections

For the exact positions and dimensions of the utility connections, refer to the dimension drawings of the pump on pages 8 and 9.

### Accessories

#### Separating can temperature monitoring

The bracket features threaded connections for the installation of a temperature sensor (PT 100) in case the separating can's surface temperature is to be monitored. The temperature sensor can be supplied with the pump. Non-required threaded connections are closed by a screw plug.

#### Load monitor

A load monitor with start-up override and release delay can be optionally supplied to monitor the pump for underload and overload or as dry running protection. This load monitor allows for the monitoring of the power factor ( $\cos \varphi$ ) or the active power of the motor and, hence, of the pump aggregate's operating state.

### Drives

Surface-cooled three-phase asynchronous motors for low voltages with cage rotor

- design IM B5
- degree of protection IP 54
- insulation class F
- power ratings and dimensions in acc. with DIN 42673 / IEC 72
- make according to our choice

Other motor versions are available upon request.

If the motors are provided by the customer, a sufficient cooling power of the motor fan must be ensured ( $> 3 \text{ m/s}$  flow rate measured at the motor's bearing shield at the pump side).

### Tests

If required, test certificates in acc. with DIN 55350-18 can be provided for the individual tests, which, however, has to be indicated in the order.

#### Material tests in acc. with EN 10204

The exact scope of the tests (which test for which parts) as well as the type of certificate (certificate of compliance with the order, factory certificate, inspection certificate) must be specified in the order.

Non-specific material tests do not have any impact on the delivery time of the pump.

If specific material tests are required, the delivery time of the pump depends on the availability of raw materials and will be checked on a case-to-case basis.

Test certificates for specific material tests cannot be provided after the raw materials and/or semi-finished goods have been negotiated.

#### Gas pressure tests

All pressure bearing parts, e.g.

- volute casing
- casing cover

are subject to a gas pressure test (leakage test).

The gas pressure test is carried out by applying forming gas at 2 bar. The holding time is 15 minutes. By means of this test, the tightness of the parts is proven.

### Hydrostatic pressure test

All pressure bearing parts are subject to a pressure test, during which the hydrostatic test pressure ( $p_{\text{test}}$ ) corresponds to 1.3 times the basic design pressure ( $p_{\text{b}}$ ) at 20°C, following the recommendations of prEN 12162. The holding time is 10 minutes.

If pressure tests are to be carried out in acc. with other criteria, such criteria must be indicated in the inquiry.

By means of this test, the strength of the parts is proven.

### Hydraulic tests (performance curves)

If required, hydraulic tests in acc. with ISO 9906, accuracy class II, can be implemented and the performance curves measured for the corresponding impeller diameter documented.

This option has to be indicated accordingly in the order. The purpose of this test is to verify that the duty point of the manufactured pump complies with the contractual duty point.



### Painting



The pumps are coated with highly heat-resistant white aluminium paint, colour code RAL 9006.

## TOE-MI

Heat transfer pumps with magnetic coupling in inline design

### Performance curves 50 Hz


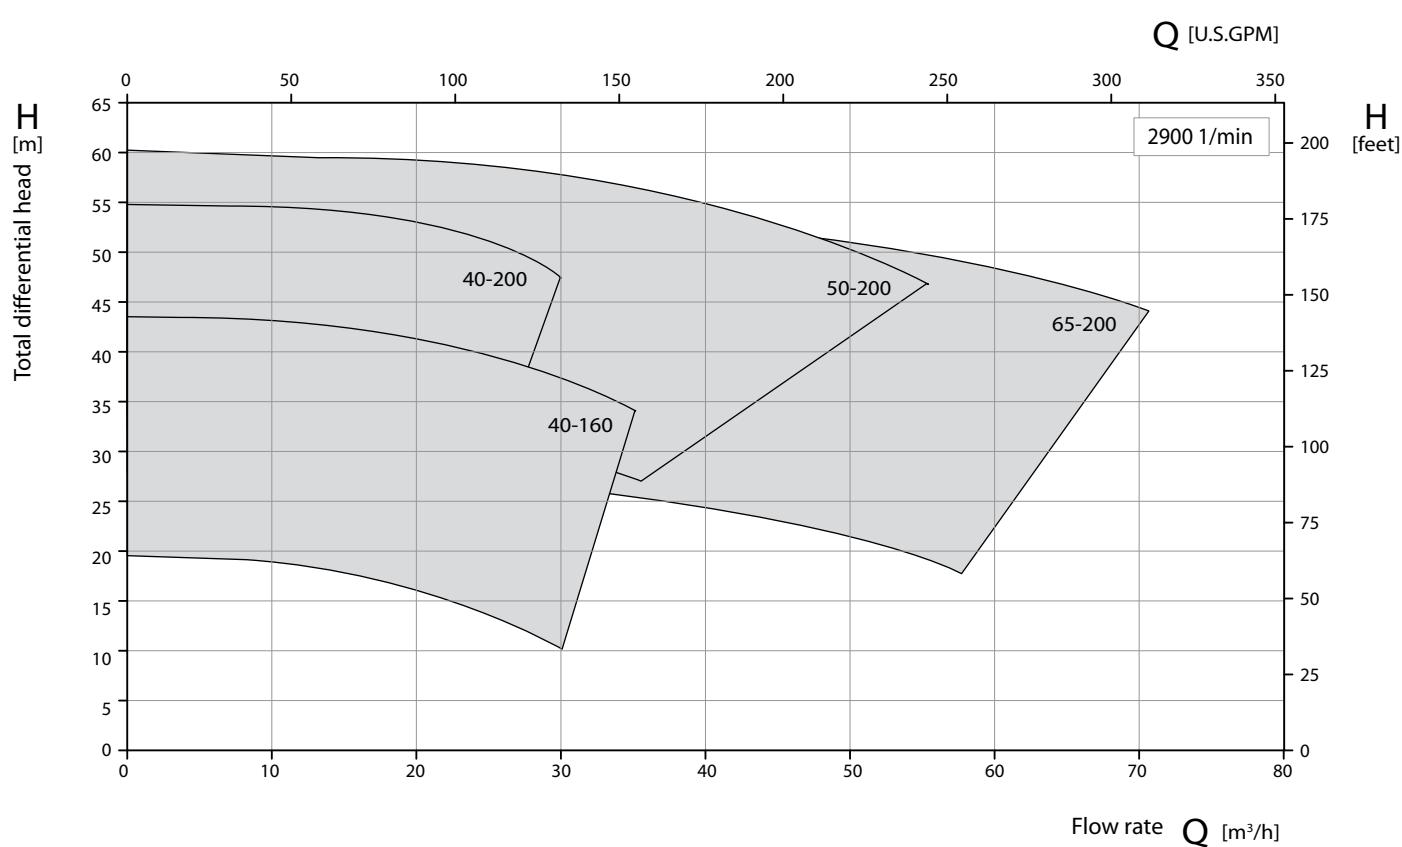
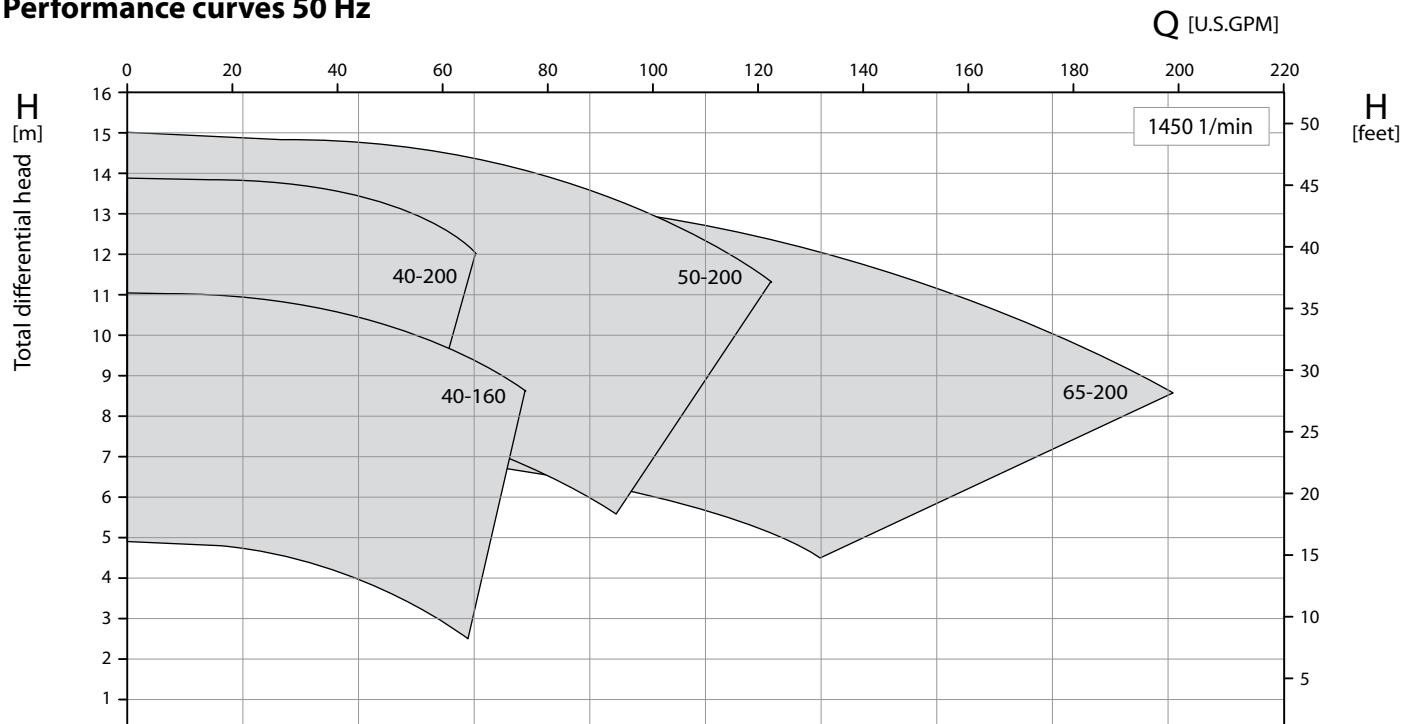


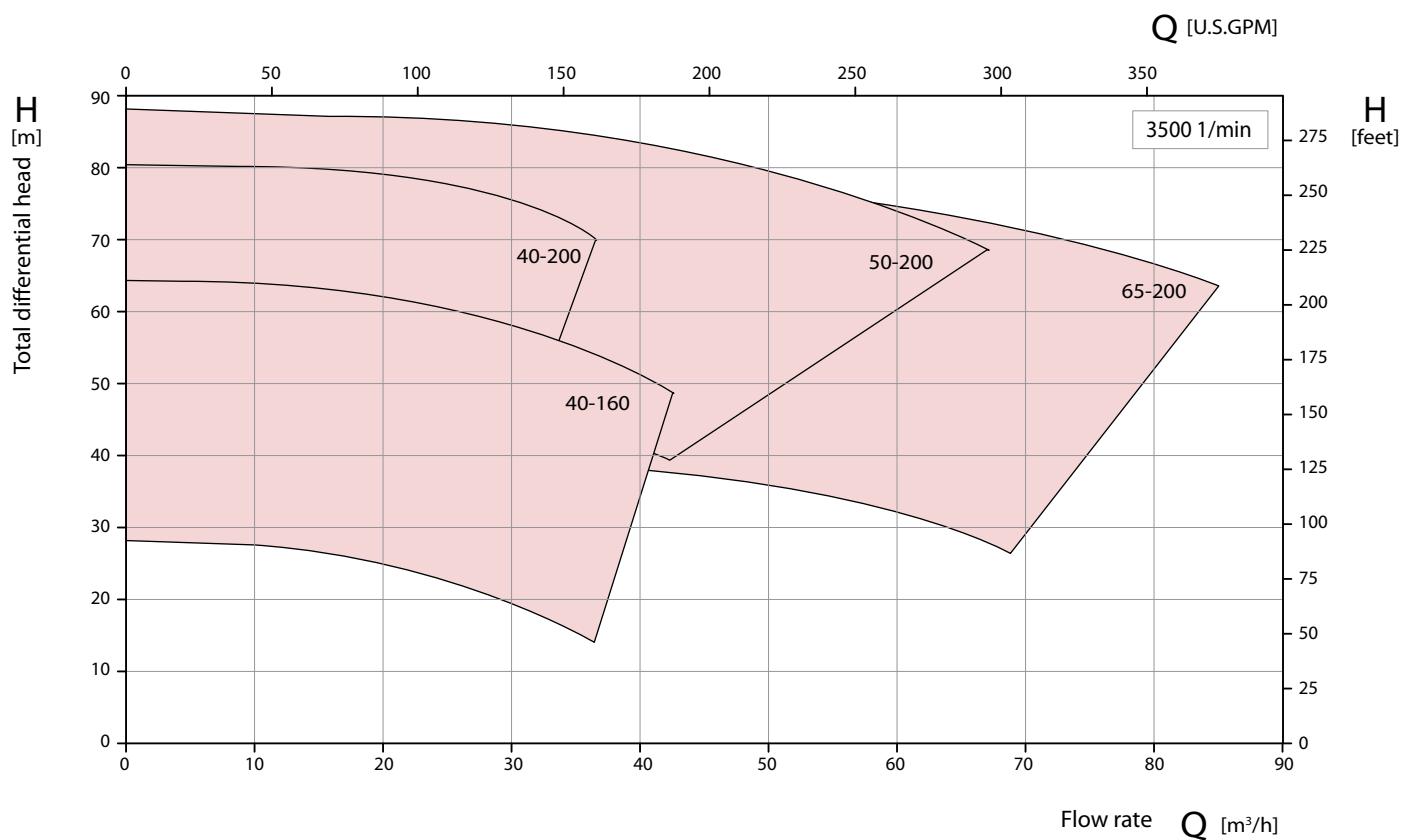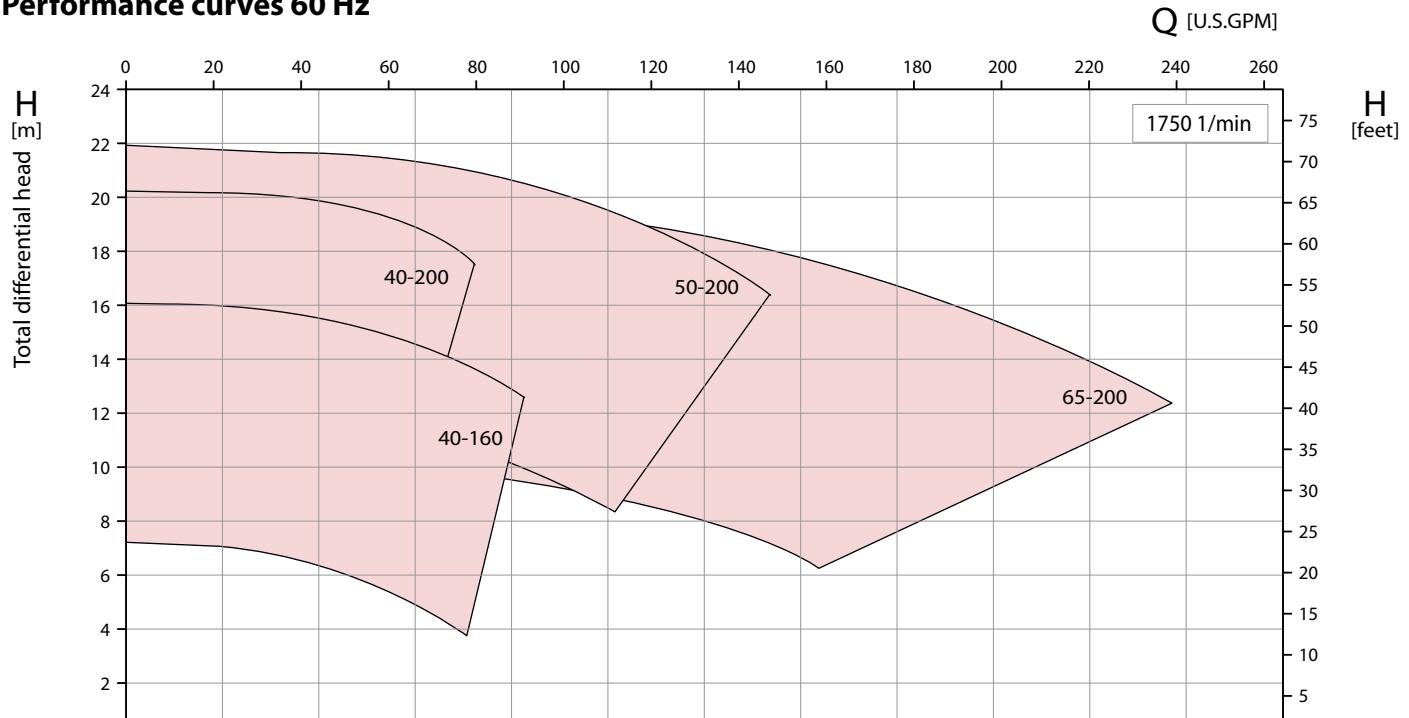**Performance curves 60 Hz**


## TOE-MI

Heat transfer pumps with magnetic coupling in inline design

### Pump dimensions

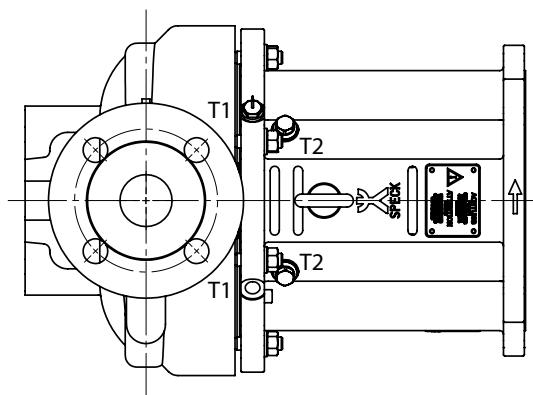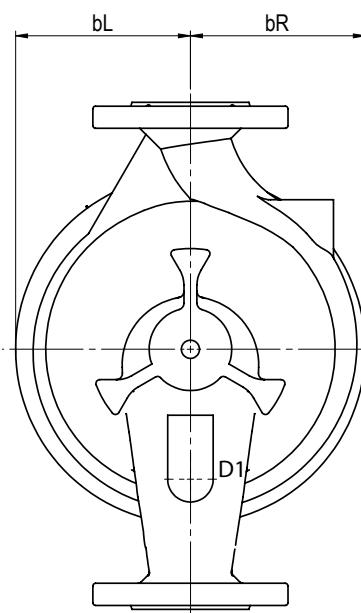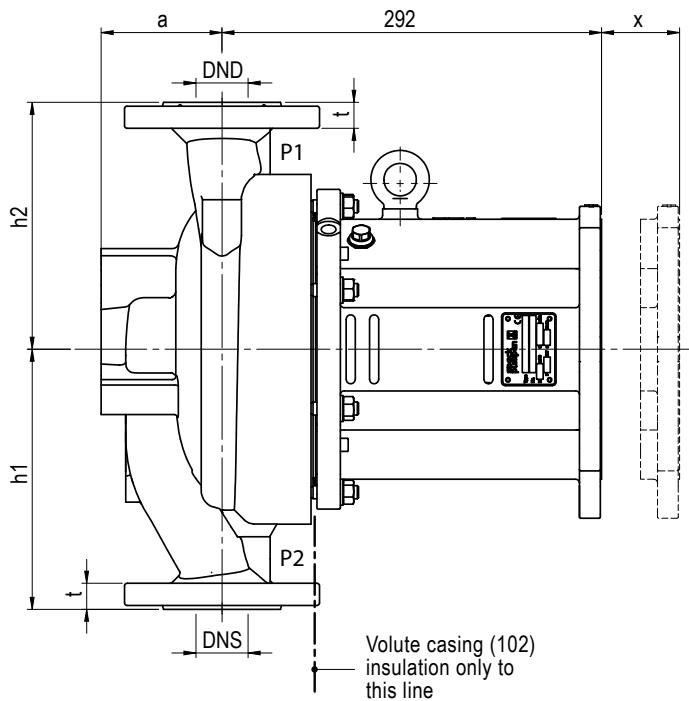

Flange dimensions EN 1092-2

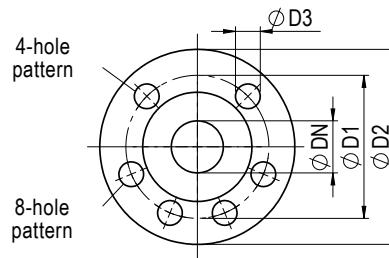

| Pump   | Pump dimensions |     |     |     |     |     |     | Pull-out |
|--------|-----------------|-----|-----|-----|-----|-----|-----|----------|
| Size   | DNS             | DND | a   | bL  | bR  | h1  | h2  | x        |
| 40-160 | 40              | 40  | 97  | 116 | 116 | 200 | 190 | 110      |
| 40-200 |                 |     | 93  | 135 | 135 |     |     |          |
| 50-200 | 50              | 50  | 102 | 126 | 139 | 220 | 205 |          |
| 65-200 | 65              | 65  | 112 | 131 | 151 | 240 | 225 |          |

## Utility connections and flange dimensions

### Utility connections

|           |  |       |
|-----------|--|-------|
| <b>P1</b> | Outlet pressure indicator connection (not drilled) | G 1/4 |
| <b>P2</b> | Inlet pressure indicator connection (not drilled)  | G 1/8 |
| <b>D1</b> | Volute casing drain                                | G 3/8 |
| <b>T1</b> | Temperature sensor PT 100 MK 110 / 135             | G 1/4 |
| <b>T2</b> | Temperature sensor PT 100 MK 75                    | G 1/4 |


### Flange dimensions in acc. with DIN EN 1092-2

| øDN | øD2 | øD1 | t  | øD3 | Qt. Holes |
|-----|-----|-----|----|-----|-----------|
| 32  | 140 | 100 | 18 | 19  | 4         |
| 40  | 150 | 110 | 18 |     |           |
| 50  | 165 | 125 | 20 |     |           |
| 65  | 185 | 145 | 20 |     | 8         |
| 80  | 200 | 160 | 22 |     |           |
| 100 | 220 | 180 | 24 |     |           |

## TOE-MI

Heat transfer pumps with magnetic coupling in inline design

### Cross-sectional drawing and part list

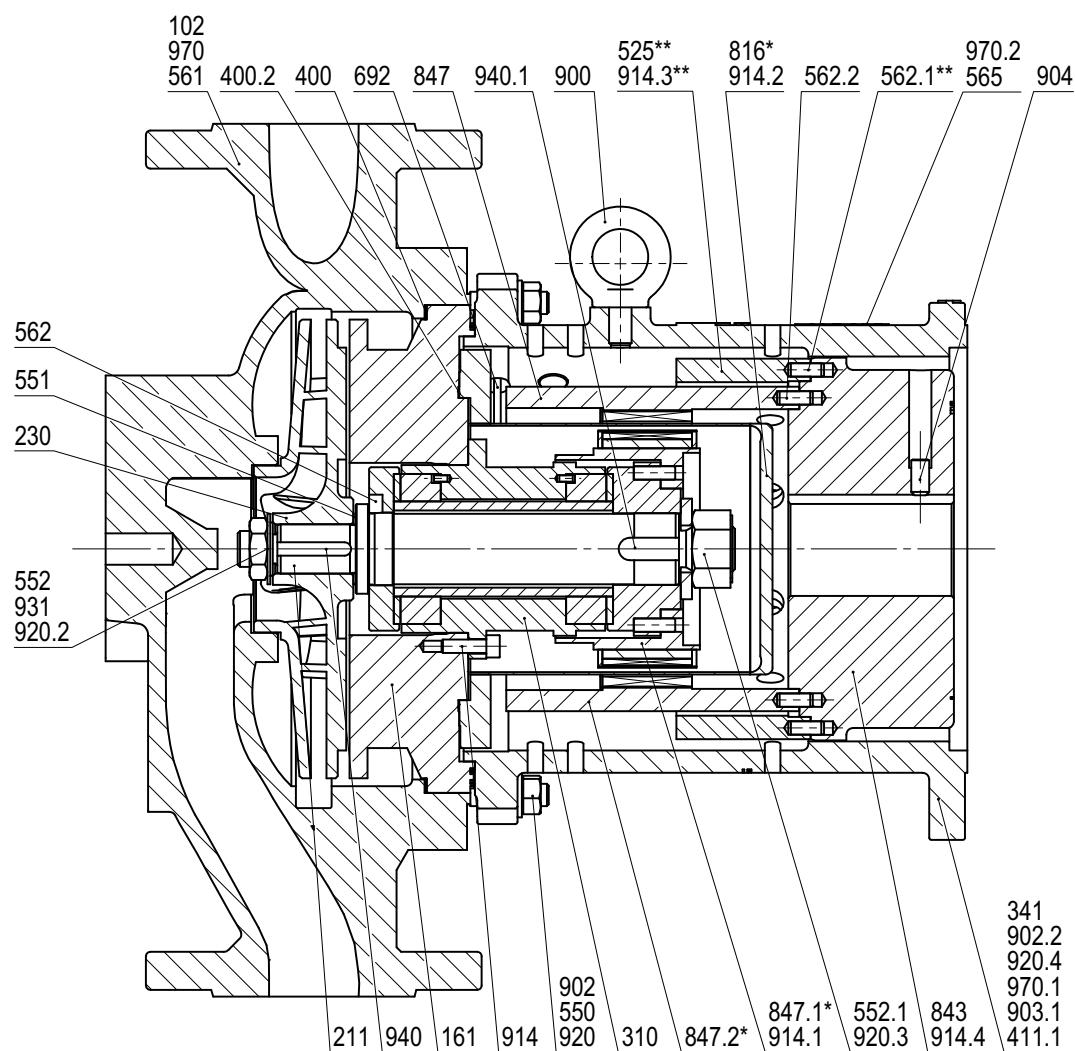

### Standard design with nominal impeller diameter 160 and 200 mm

|            |                  |                    |                             |                    |                       |
|------------|------------------|--------------------|-----------------------------|--------------------|-----------------------|
| 102        | Volute casing    | 551                | Shim washer                 | 847.2*             | External rotor        |
| 161        | Casing cover     | 552 - 552.1        | Disk spring                 | 900                | Ring bolt             |
| 211        | Shaft            | 561                | Grooved pin                 | 902, 902.2         | Stud                  |
| 230        | Impeller         | 562-562.1**, 562.2 | Parallel pin                | 903.1              | Screwed plug          |
| 310        | Bearing complete | 565                | Rivet                       | 904                | Set screw             |
| 341        | Bracket          | 692                | Temperature sensor          | 914-914.3**, 914.4 | Socket head cap screw |
| 400, 400.2 | Flat gasket      | 816*               | Separating can              | 920, 920.2-920.4   | Hexagon nut           |
| 411.1      | Ring gasket      | 843                | Coupling insert             | 931                | Lock washer           |
| 525**      | Distance sleeve  | 847                | Magnetic coupling, complete | 940-940.1          | Key                   |
| 550        | Washer           | 847.1*             | Internal rotor              | 970-970.2          | Plate                 |

\* Single components of magnetic coupling (847)

\*\* Execution with MK 75 / 110 only


**Interchangeability of parts in between TOE-MN / MA / MI series**

| Component                   | Position | Pump type        | Pump size |        |        |        |        |        |        |        |        |        |        |        |
|-----------------------------|----------|------------------|-----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
|                             |          |                  | 32-160    | 32-200 | 32-250 | 40-160 | 40-200 | 40-250 | 50-160 | 50-200 | 50-250 | 65-160 | 65-200 | 80-160 |
| Volute casing               | 102      | TOE-MN / MA      | 1         | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9      | 10     | 11     | 12     |
|                             |          | TOE-MI           |           | 0      |        | 1      | 2      | 0      |        | 3      | 0      | 4      | 0      |        |
| Casing cover                | 161      | TOE-MN / MA      | 1         | 2      |        | 1      | 2      | 2      | 1      | 2      | 2      | 1      | 2      | 2      |
|                             |          | TOE-MI           |           | 0      |        | 1      | 2      | 0      |        | 2      | 0      | 2      | 0      |        |
| Shaft                       | 211      | TOE-MN / MA / MI |           |        |        |        |        |        |        | 1      |        |        |        |        |
| Shaft                       | 212      | TOE-MN           |           |        |        |        |        |        |        | 1      |        |        |        |        |
|                             |          | TOE-MA / MI      |           |        |        |        |        |        |        | 0      |        |        |        |        |
| Impeller                    | 230      | TOE-MN / MA      | 1         | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9      | 10     | 11     | 12     |
|                             |          | TOE-MI           |           | 0      |        | 1      | 2      | 0      |        | 3      | 0      | 4      | 0      |        |
| Bearing                     | 310      | TOE-MN / MA / MI |           |        |        |        |        |        |        | 1      |        |        |        |        |
| Ball bearing                | 320      | TOE-MN           |           |        |        |        |        |        |        | 1      |        |        |        |        |
|                             |          | TOE-MA / MI      |           |        |        |        |        |        |        | 0      |        |        |        |        |
| Bearing housing             | 330      | TOE-MN           |           |        |        |        |        |        |        | 1      |        |        |        |        |
|                             |          | TOE-MA / MI      |           |        |        |        |        |        |        | 0      |        |        |        |        |
| Bracket                     | 341      | TOE-MN / MA / MI |           |        |        |        |        |        |        | 0      |        |        |        |        |
| Bearing cover               | 360      | TOE-MN           |           |        |        |        |        |        |        | 1      |        |        |        |        |
|                             |          | TOE-MA / MI      |           |        |        |        |        |        |        | 0      |        |        |        |        |
| Shaft sealing               | 420      | TOE-MN           |           |        |        |        |        |        |        | 1      |        |        |        |        |
|                             |          | TOE-MA / MI      |           |        |        |        |        |        |        | 0      |        |        |        |        |
| Counter flange              | 720      | TOE-MN / MA      | 0         | 1      | 0      | 1      | 0      | 1      | 0      | 1      | 0      |        |        |        |
|                             |          | TOE-MI           |           |        |        |        |        |        |        | 0      |        |        |        |        |
| Flat gasket                 | 400      | TOE-MN / MA / MI |           |        |        |        |        |        |        | 1      |        |        |        |        |
| Flat gasket                 | 400.1    | TOE-MN / MA      | 0         | 1      | 0      | 1      | 0      | 1      | 0      | 1      | 0      |        |        |        |
|                             |          | TOE-MI           |           |        |        |        |        |        |        | 0      |        |        |        |        |
| Flat gasket                 | 400.2    | TOE-MN / MA / MI |           |        |        |        |        |        |        | 1      |        |        |        |        |
| Distance sleeve MK 75 / 110 | 525      | TOE-MN / MA / MI |           |        |        |        |        |        |        | 1      |        |        |        |        |
| Distance sleeve MK 135      | 525      | TOE-MN / MA / MI |           |        |        |        |        |        |        | 0      |        |        |        |        |
| Coupling insert             | 843      | TOE-MN / MA / MI |           |        |        |        |        |        |        | 1      |        |        |        |        |
| Magnetic coupling           | 847      | TOE-MN / MA / MI |           |        |        |        |        |        |        | 1      |        |        |        |        |
| Other parts                 |          | TOE-MN / MA / MI |           |        |        |        |        |        |        | 1      |        |        |        |        |

## TOE-MI

Heat transfer pumps with magnetic coupling in inline design

### Dimensional drawing

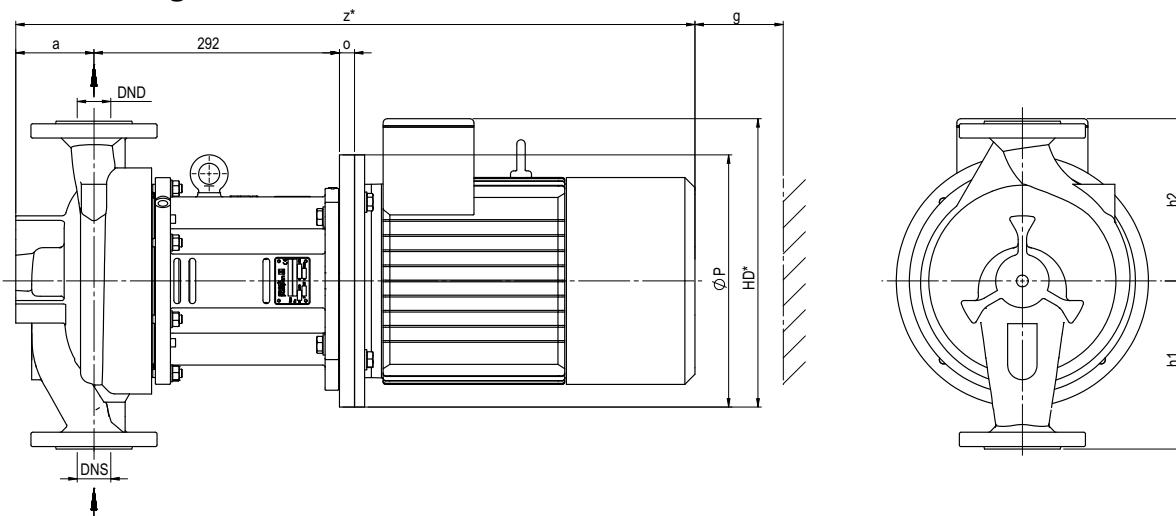

| Pump   | Motor      |        |                | Power kW    |             | Pump dimensions |             |     |     |     | Pump set dimensions |     |               |     |     |    |     |     |
|--------|------------|--------|----------------|-------------|-------------|-----------------|-------------|-----|-----|-----|---------------------|-----|---------------|-----|-----|----|-----|-----|
| Size   | Frame size | Design | P, $\emptyset$ | 4-pole      |             | 2-pole          |             | DNS | DND | a   | h1                  | h2  | $\emptyset D$ | HD* | g   | o  | z*  |     |
|        |            |        |                | 1450 / 1750 | 2900 / 3500 | 2900 / 3500     | 2900 / 3500 |     |     |     |                     |     |               |     |     |    |     |     |
| 40-160 | 80         | B5     | 250            | 0.55 / 0.75 | 0.75 / 1.1  |                 |             |     |     |     |                     |     |               | 19  | 254 | 30 | -   | 744 |
|        | 90 S       |        | 250            | 1.1         | 1.5         |                 |             |     |     |     |                     |     |               | 24  | 273 | 35 | -   | 733 |
|        | 90L        |        | 250            | 1.5         | 2.2         |                 |             |     |     |     |                     |     |               | 28  | 273 | -  | -   | 758 |
|        | 100L       |        | 250            | 2.2 / 3     | 3           |                 |             |     |     |     |                     |     |               | 28  | 280 | 50 | -   | 792 |
|        | 112M       |        | 250            | 4           | 4           |                 |             | 40  | 40  | 97  | 200                 | 190 |               | 293 | -   | -  | 809 |     |
|        | 132 S      |        | 250            | 5.5         | 5.5 / 7.5   |                 |             |     |     |     |                     |     |               | 313 | -   | -  | 915 |     |
|        |            |        | 300            |             |             |                 |             |     |     |     |                     |     |               | 343 | 100 | 18 | 912 |     |
|        | 132M       |        | 250            | 7.5         | -           |                 |             |     |     |     |                     |     |               | 313 | -   | -  | 915 |     |
|        |            |        | 300            |             |             |                 |             |     |     |     |                     |     |               | 343 | -   | 18 | 912 |     |
| 40-200 | 80         | B5     | 250            | 0.55 / 0.75 | 0.75 / 1.1  |                 |             |     |     |     |                     |     |               | 19  | 254 | 30 | -   | 740 |
|        | 90 S       |        | 250            | 1.1         | 1.5         |                 |             |     |     |     |                     |     |               | 24  | 273 | 35 | -   | 729 |
|        | 90L        |        | 250            | 1.5         | 2.2         |                 |             |     |     |     |                     |     |               | 28  | 273 | -  | -   | 754 |
|        | 100L       |        | 250            | 2.2 / 3     | 3           |                 |             |     |     |     |                     |     |               | 28  | 280 | 50 | -   | 788 |
|        | 112M       |        | 250            | 4           | 4           |                 |             | 40  | 40  | 93  | 200                 | 190 |               | 293 | -   | -  | 805 |     |
|        | 132 S      |        | 250            | 5.5         | 5.5 / 7.5   |                 |             |     |     |     |                     |     |               | 313 | -   | -  | 911 |     |
|        |            |        | 300            |             |             |                 |             |     |     |     |                     |     |               | 343 | 100 | 18 | 908 |     |
|        | 132M       |        | 250            | 7.5         | -           |                 |             |     |     |     |                     |     |               | 313 | -   | -  | 911 |     |
|        |            |        | 300            |             |             |                 |             |     |     |     |                     |     |               | 343 | -   | 18 | 908 |     |
| 50-200 | 80         | B5     | 250            | 0.55 / 0.75 | 0.75 / 1.1  |                 |             |     |     |     |                     |     |               | 19  | 254 | 30 | -   | 749 |
|        | 90 S       |        | 250            | 1.1         | 1.5         |                 |             |     |     |     |                     |     |               | 24  | 273 | 35 | -   | 738 |
|        | 90L        |        | 250            | 1.5         | 2.2         |                 |             |     |     |     |                     |     |               | 28  | 273 | -  | -   | 763 |
|        | 100L       |        | 250            | 2.2 / 3     | 3           |                 |             |     |     |     |                     |     |               | 28  | 280 | 50 | -   | 797 |
|        | 112M       |        | 250            | 4           | 4           |                 |             | 50  | 50  | 102 | 220                 | 205 |               | 293 | -   | -  | 814 |     |
|        | 132 S      |        | 250            | 5.5         | 5.5 / 7.5   |                 |             |     |     |     |                     |     |               | 313 | -   | -  | 920 |     |
|        |            |        | 300            |             |             |                 |             |     |     |     |                     |     |               | 343 | 100 | 18 | 917 |     |
|        | 132M       |        | 250            | 7.5         | -           |                 |             |     |     |     |                     |     |               | 313 | -   | -  | 920 |     |
|        |            |        | 300            |             |             |                 |             |     |     |     |                     |     |               | 343 | -   | 18 | 917 |     |
| 65-200 | 90 S       | B5     | 250            | 1.1         | 1.5         |                 |             |     |     |     |                     |     |               | 24  | 273 | 35 | -   | 748 |
|        | 90L        |        | 250            | 1.5         | 2.2         |                 |             |     |     |     |                     |     |               | 28  | 273 | -  | -   | 773 |
|        | 100L       |        | 250            | 2.2 / 3     | 3           |                 |             |     |     |     |                     |     |               | 28  | 280 | 50 | -   | 807 |
|        | 112M       |        | 250            | 4           | 4           |                 |             | 65  | 65  | 112 | 240                 | 225 |               | 293 | -   | -  | 824 |     |
|        | 132 S      |        | 250            | 5.5         | 5.5 / 7.5   |                 |             |     |     |     |                     |     |               | 313 | -   | -  | 930 |     |
|        |            |        | 300            |             |             |                 |             |     |     |     |                     |     |               | 343 | 100 | 18 | 927 |     |
|        | 132M       |        | 250            | 7.5         | -           |                 |             |     |     |     |                     |     |               | 313 | -   | -  | 930 |     |
|        |            |        | 300            |             |             |                 |             |     |     |     |                     |     |               | 343 | -   | 18 | 927 |     |

\*Dimensions can differ depending on the motor supplier.

## Pump data sheet


|  |   |                  | Heat Transfer Pump<br>Technical Data Sheet  |                               |                      | Quotation<br>Date<br>Item                |                       |               |      |  |
|---|---|------------------|---|-------------------------------|----------------------|--|-----------------------|---------------|------|--|
|   |   |                  | Pump Model  |                               |                      | SPECK PUMPEN Systemtechnik GmbH          |                       |               |      |  |
|   |   |                  | Regensburger Ring 6 - 8 D-91154 Roth Tel.: 09171/809-0 Fax: 09171/809-10 www.speck-pumps.de |                               |                      |  |                       |               |      |  |
| 1   | Pump Model:   |                  | Quantity:   |                               |                      |  |                       |               |      |  |
| 2   | Customer  |                  | Location  |                               |                      | Page:                                    | of:                   | pages         |      |  |
| 3   | Phone   |                  | Fax   |                               |                      | Iss. / Dpt.:                             |                       |               |      |  |
| 4   | Contact   |                  | E-Mail  |                               |                      | Phone:                                   |                       |               |      |  |
| 5   | PO  |                  | dated   |                               |                      | Fax:                                     |                       |               |      |  |
| 6   | Project   |                  | Pump No.  |                               |                      | E-Mail                                   |                       |               |      |  |
| <b>Installation / Environment</b>   |   |                  |   |                               |                      |  |                       |               |      |  |
| 7   | Building / Outside  |                  | Altitude  |                               | m                    | Amb. temp                                | Start-up temp.        | rel. Humidity |      |  |
| 8   | under roof yes/no   |                  | Hazardous area  | -                             | min.:                | max:                                     | min.:                 | °C %          |      |  |
| <b>Operating (Contractual) Data</b>   |   |                  |   |                               |                      |  |                       |               |      |  |
| 9   | Fluid   |                  | Flow rate   | rated                         |                      | m <sup>3</sup> /h                        | Reference Speed       | 1/min         |      |  |
| 10  | corrosive matters   |                  | min / max   |                               |                      | m <sup>3</sup> /h                        | direction of rotation | 1)            |      |  |
| 11  | abrasive matters  |                  | Inlet   |                               | bar (ü)              | Hydr. efficiency                         |                       | %             |      |  |
| 12  | Solid content   |                  | Disch.  |                               | bar (ü)              | hydr. power cons.                        |                       | kW            |      |  |
| 13  | Oper. Temp. tA  |                  | Tot. Diff. Head rated   |                               | m                    | power loss                               |                       | kW            |      |  |
| 14  | Density @ tA  |                  | pressure differential   |                               | bar                  | Total abs. power                         |                       | kW            |      |  |
| 15  | Kin. viscosity @tA  |                  | NPSH  | available                     | m                    | abs. power at cold start                 |                       | kW            |      |  |
| 16  | Vapor press. @ tA   |                  |   | required                      | m                    | Duty point data to DIN EN ISO 9906 Cl. 2 |                       |               |      |  |
| <b>Pump design</b>  |   |                  |   |                               |                      |  |                       |               |      |  |
| 17  | Impeller-Ø  |                  | Inlet-nozzle  | nom. diam. DN                 |                      | Bearings                                 | impeller side         | coupling side |      |  |
| 18  | No of stages  |                  |   | location                      |                      | Type                                     |                       |               |      |  |
| 19  | nom. pressure PN  |                  |   | machined to                   |                      | Lubrication                              |                       |               |      |  |
| 20  | max. all. Cas. press. @ tA                                  |                  | Outlet-nozzle   | nom. diam. DN                 |                      | Shaft seal                               | Mechanical seal       |               |      |  |
| 21  | Cooling 'C' / Heating 'H'                                   |                  |   | location                      |                      | Type                                     |                       |               |      |  |
| 22  | Volute casing   | Casing cover     | Bearing bracket   | machined to                   |                      | Size                                     |                       |               |      |  |
| 23  | -   | -                | -   | Sound pressure level 2)       | - dB(A)              | Quench yes/no                            |                       |               |      |  |
| <b>Accessories</b>  |   |                  |   |                               |                      |  |                       |               |      |  |
| 24  | AC Electric Motor   | Power            | kW  | Frame                         | Ex-protection        |  | Coupling              | Size/Spacer   | / mm |  |
| 25  |   | Frequency        | Hz  | Enclos.                       | Make                 |  |                       | Make          | Type |  |
| 26  |   | Voltage          | V   | Construct.                    | Delivered by         |  |                       |               |      |  |
| 27  |   | Nom. Speed       | 1/min   | Current                       | mounted by           |  |                       | Baseplate     |      |  |
| <b>Materials</b>  |   |                  |   |                               |                      |  |                       |               |      |  |
| 28  | Volute casing   |                  | bearing bracket   |                               | containm. shell      |  |                       |               |      |  |
| 29  | Casing cover  |                  | motor lantern   |                               | sleeve bearing       |  |                       |               |      |  |
| 30  | Impeller  |                  | cas. wear ring  |                               | coupl.+guard         |  | /                     |               |      |  |
| 31  | Shaft   |                  | imp. wear ring  |                               | Baseplate            |  |                       |               |      |  |
| <b>Tests and Inspections</b>  |   |                  |   |                               |                      |  |                       |               |      |  |
| 32  | 1. Material Tests:  | Kind of Test     | Test Certificate 3)   | 4. Other Tests Tests:         | Witnessed by:        | Test Certif.                             |                       |               |      |  |
| 33  | 1.1 volute casing   |                  |   | 4.1 Hydrost. Pressure Test 4) |                      |  |                       |               |      |  |
| 34  | 1.2 Cas. Cover  |                  |   | 4.2 Gas Pressure Test         |                      |  |                       |               |      |  |
| 35  | 1.3 Bearing frame   |                  |   | 4.3 Performance curve 5)      |                      |  |                       |               |      |  |
| 36  | 1.4 Impeller  |                  |   | 4.4 Final check               |                      |  |                       |               |      |  |
| 37  | 1.5 Shaft   |                  |   | 4.5                           |                      |  |                       |               |      |  |
| 38  | 1.6   |                  |   | 4.6                           |                      |  |                       |               |      |  |
| <b>Shipping data 6)</b>   |   |                  |   |                               |                      |  |                       |               |      |  |
| 39  | Total net weight appr.                                      | kg               | / Total gross weight appr.  | kg                            |                      |  |                       |               |      |  |
| <b>Documentation</b>  |   |                  |   |                               |                      |  |                       |               |      |  |
| 40  | Dimensional drwg.   | Cross sect. drwg | Performance curve   | Oper. & Instruct. Man.        | Other (see attached) | Qty each                                 | fold                  |               |      |  |
| 41  |   |                  |   |                               |                      | Language                                 |                       |               |      |  |
| <b>Remarks</b>  |   |                  |   |                               |                      |  |                       |               |      |  |
| 42  | ■ = min. information required for quotation                 |                  |   |                               |                      |  |                       |               |      |  |
| 43  | 1) = seen from driver to pump 2) = calcul. to EUROPUMP      |                  |   |                               |                      |  |                       |               |      |  |
| 44  | 3) = acc. to EN 10204 4) = volute casing & casing cover     |                  |   |                               |                      |  |                       |               |      |  |
| 45  | 5) = without NPSH-Test 6) = scope of supply see price sheet |                  |   |                               |                      |  |                       |               |      |  |
| 46  | Revision:   | Issued:          | Date:   |                               |                      |  |                       |               |      |  |

**Substance data of heat transfer media**

| Temperature | Water        |                          | Marlotherm® SH |                          | Syltherm® XLT |                          | Galden® HT 200 |                          |
|-------------|--------------|--------------------------|----------------|--------------------------|---------------|--------------------------|----------------|--------------------------|
|             | ρ<br>Density | v<br>Kinematic viscosity | ρ<br>Density   | v<br>Kinematic viscosity | ρ<br>Density  | v<br>Kinematic viscosity | ρ<br>Density   | v<br>Kinematic viscosity |
| [°C]        | [kg/m³]      | [mm²/s]                  | [kg/m³]        | [mm²/s]                  | [kg/m³]       | [mm²/s]                  | [kg/m³]        | [mm²/s]                  |
| -40         | —            | —                        | —              | —                        | —             | —                        | 1935           | 80,00                    |
| 0           | 1000         | 1,789                    | 1058           | 321,00                   | 862           | 2,40                     | 1845           | 5,20                     |
| 40          | 992          | 0,658                    | 1030           | 16,50                    | 827           | 1,34                     | 1755           | 1,80                     |
| 100         | 958          | 0,294                    | 987            | 3,10                     | 769           | 0,73                     | 1625           | 0,86                     |
| 150         | 917          | 0,201                    | 951            | 1,60                     | 714           | 0,50                     | 1520           | 0,41                     |
| 160         |              |                          | 944            | 1,40                     | 702           | 0,48                     | 1490           | 0,38                     |
| 180         |              |                          | 930            | 1,20                     | 678           | 0,43                     | 1445           | 0,36                     |
| 200         |              |                          | 915            | 0,92                     | 652           | 0,40                     |                |                          |
| 220         |              |                          | 901            | 0,77                     | 624           | 0,37                     |                |                          |
| 240         |              |                          | 887            | 0,65                     | 595           | 0,35                     |                |                          |
| 260         |              |                          | 873            | 0,57                     | 563           | 0,34                     |                |                          |
| 280         |              |                          | 858            | 0,50                     |               |                          |                |                          |
| 300         |              |                          | 844            | 0,45                     |               |                          |                |                          |
| 320         |              |                          | 830            | 0,40                     |               |                          |                |                          |
| 340         |              |                          | 815            | 0,36                     |               |                          |                |                          |

**Conversion**

Reference between height and pressure at different gravities

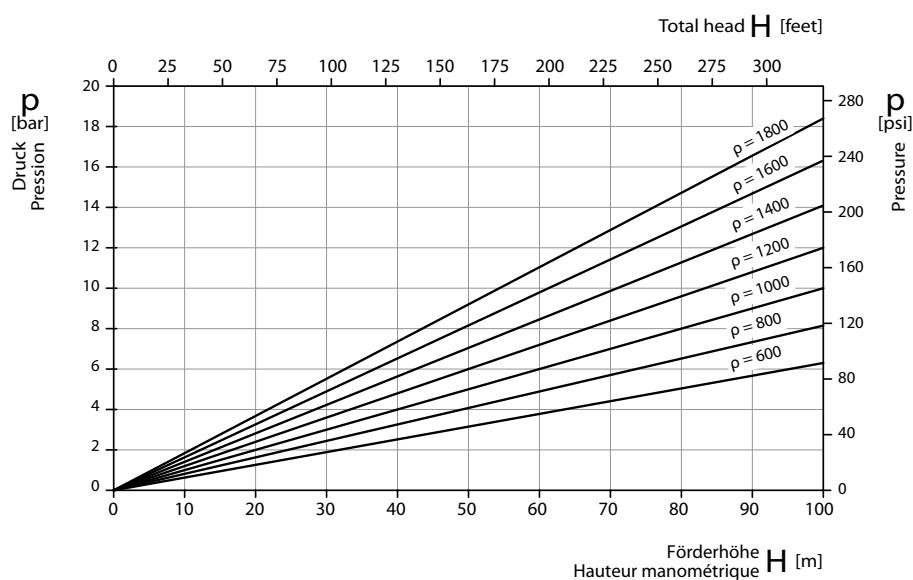
**More information?**

Then visit our website, where further catalogues can be downloaded.

**Speck Pumpen  
Production Program**
**Peripheral Impeller Pumps**

- Small Centrifugal Pumps
- Heat Transfer Pumps
- Submersible Pumps

**Radial Impeller Pumps**

- Small Centrifugal Pumps
- Heat Transfer Pumps with mechanical seal
- Heat Transfer Pumps with magnetic coupling
- Boiler Feed Pumps

**Side Channel Pumps**

- Pumps - Standard EN 734
- With NPSH-Stage
- Small Pumps

**Displacement Pumps**

- Roller Vane Pumps
- Gear Pumps
- Oscillating Piston Pump

**Liquid Ring Vacuum Pumps**

- Close Coupled Version
- Base Plate Version

## (D) Germany

**Deutschland Ost**  
 Huckauf Ingenieure  
 Auerswalder Hauptstraße 2  
 09244 Lichtenau  
 Tel.: +(49) 37208 660 80  
 Fax: +(49) 37208 660 77  
 info@huckauf.de  
 www.huckauf.de

**Berlin**  
 Huckauf Ingenieure  
 Fontanepromenade 17  
 10967 Berlin  
 Tel.: +(49) 30 890 959 92  
 Fax: +(49) 30 890 959 91  
 info@huckauf.de  
 www.huckauf.de

**Hamburg**  
 Ingenieure Willy Wandach GmbH  
 Flurstraße 105  
 22549 Hamburg  
 Tel.: +(49) 40 398 624 0  
 Fax: +(49) 40 390 585 5  
 info@speck-pumpen-roth.de  
 www.speck-pumpen-roth.de

**Hannover, Kassel**  
 IVT – Pumpen GmbH  
 Zum Wilschfeld 1A  
 31749 Auetal  
 Tel.: +(49) 5752 929 597  
 Fax: +(49) 5752 929 599  
 Mobile: +(49) 172 511 699 9  
 info@ivt-pumpen.de  
 www.ivt-pumpen.de

**Köln**  
 Huckauf Ingenieure  
 Grillenpfad 28  
 40764 Langenfeld  
 Tel.: +(49) 2173 914 560  
 Fax: +(49) 2173 914 588  
 info@huckauf.de  
 www.huckauf.de

**Bayern, Baden-Württemberg**  
 Speck Pumpen  
 VÉRKAUFGESSELLSCHAFT GmbH  
 Hauptstraße 1 – 3  
 91233 Neunkirchen a. Sand  
 Tel.: +(49) 9123 949 – 0  
 Fax: +(49) 9123 949 – 260  
 info@speck-pumps.com  
 www.speck-pumps.com

## Service

**Deutschland Ost**  
 FSE Fluid Systems Erfurt  
 Am Teiche 3  
 99195 Erfurt/Stötternheim  
 Tel.: +(49) 36204 739 910  
 Fax: +(49) 36204 739 919  
 info@fluidsystems.org  
 www.fluidsystems.org

**Köln**  
 Arpuma GmbH  
 Sonnenhang 33  
 50127 Bergheim  
 Tel.: +(49) 2271 837 70  
 Fax: +(49) 2271 837 720  
 info@arpuma.de  
 www.arpuma.de

## Europe

**Austria**  
 Tuma Pumpensysteme GmbH  
 Ettengasse 12  
 1230 Wien  
 Tel.: +(43) 191 493 40  
 Fax: +(43) 191 493 401 6  
 contact@tumapumpen.at  
 www.tumapumpen.at

**Belgium**  
 SPECK - Pompen Belgie N.V.  
 Bierweg 24  
 9880 Aalter  
 Tel.: +(32) 937 530 39  
 Fax: +(32) 932 500 17  
 info@speckpompen.be  
 www.speckpompen.be

## (BG) Bulgaria

EVROTECH OOD  
 54 A, Manastirska Str.  
 1111 Sofia  
 Tel.: +(359) 2 971 32 73  
 Fax: +(359) 2 971 22 88  
 office@evrotech.com  
 www.evrotech.com

## (CH) Switzerland

E.W. Müller AG  
 Roggenacker 6  
 8808 Pfäffikon  
 Tel.: +(41) 554 104 118  
 Fax: +(41) 554 105 615  
 info@ewmuellerag.ch  
 www.ewmuellerag.ch

## (CZ) Czech Republic

Sigmet spol s.r.o.  
 Kosmonautu c.p. 1085/6  
 77200 Olomouc  
 Tel.: +(420) 585 231 070  
 Fax: +(420) 585 227 072  
 sigmet@sigmet.cz  
 www.sigmet.cz

## (DK) Denmark

Pumpegruppen a/s  
 Lundtoftegårdsvæj 95  
 2800 Lyngby  
 Tel.: +(45) 459 371 00  
 Fax: +(45) 459 347 55  
 info@pumpegruppen.dk  
 www.pumpegruppen.dk

## (E) Spain

**Speck Pumpen Subsidiary**  
 SPECK BOMBAS INDUSTRIALES, S.L.U.  
 Trafalgar, 53 despacho 6  
 Centro de Negocios CNAF  
 46023 Valencia  
 Tel.: +(34) 963 811 094  
 Fax: +(34) 963 811 096  
 Mobile: +(34) 618 376 241  
 speck-spain@terra.es  
 www.speck-pumps.de

## (F) France

**Speck Pumpen Subsidiary**  
 Speck Pompes Industries S.A.  
 Z.I. Parc d'Activités du Ried  
 4 rue de l'Energie  
 B.P. 227  
 67727 Hoerdt Cedex  
 Tel.: +(33) 3.88.68.26.60  
 Fax: +(33) 3.88.68.16.86  
 info@speckpi.fr

## (GB) Great Britain

ABC Pump Sales & Services  
 Subsidiary of ABC Power Tools  
 Services Ltd.  
 AreenA House  
 Moston Road,  
 Elworth, Sandbach  
 Cheshire CW11 3HL  
 Tel.: +(44) 844 764 063 2  
 Fax: +(44) 844 764 063 4  
 admin@speck-abc.com  
 www.speck-abc.com

## (GR) Greece

SPECK Hellas  
 Salaminos St. 54  
 17676 Kallithea  
 Tel.: +(30) 210 956 500 6  
 Fax: +(30) 210 957 747 3  
 speck@otenet.gr

## (I) Italy

**Centrifugal pumps / Pompe centrifughe**  
 Klaus Union Pompe e Valvole S.r.l.  
 Via Piave, 17  
 20027 Rescaldina (MI)  
 Tel.: +(39) 033 157 982 3  
 Fax: +(39) 033 157 982 5  
 info@klausunion.it  
 www.klausunion.it

**Vacuum pumps / Pompe per vuoto**  
 Rio Nanta S.r.l.  
 Via Mauro Macchi, 42  
 20124 Milano  
 Tel.: +(39) 028 940 642 1  
 Fax: +(39) 028 323 913  
 Mobile: +(39) 339 658 781 6  
 rionanta@rionanta.it  
 www.rionanta.it

## (N) Norway

Ing. Per Gjerdarum A/S  
 P.O. Box 154  
 Nye Vakasvei 28  
 1360 Nesbru  
 Tel.: +(47) 667 756 00  
 Fax: +(47) 667 756 01  
 Pg-pumps@pergjerdrum.no  
 www.pg-marinegroup.com

## (NL) Netherlands

**Centrifugal pumps / Centrifugalpompen**  
 SPECK - Pompen Nederland B.V.  
 Postbus 218  
 6900 AE Zevenaar  
 Tel.: +(31) 316 331 757  
 Fax: +(31) 316 528 618  
 info@speck.nl  
 www.speck.nl

**Vacuum pumps / Vacuümpompen**  
 DOVAC B.V.  
 Meen en Duin 228  
 2163 LD Lisse  
 Tel.: +(31) 252 423 363  
 Fax: +(31) 252 417 946  
 info@dovac.nl  
 www.dovac.nl

## (P) Portugal

Ultra Controlo  
 Projectos Industriais, Lda.  
 Quinta Lavi – Armazém 8  
 Abrunheira  
 27 10 - 089 Sintra  
 Tel.: +(351) 219 154 350  
 Fax: +(351) 219 259 002  
 info@ultra-controlo.com  
 www.ultra-controlo.com

## (PL) Poland

E.A. Krupinski Elzbieta Krupinska  
 ul. Przymiarki 4A  
 31-764 Krakow  
 Tel. / Fax: +(48) 126 455 684  
 biuro@krupinski.krakow.pl  
 www.krupinski.krakow.pl

## (RO) Romania

Klaus Union S.R.L.  
 Str. Piata Alexandru, Lahovary  
 Nr. 1A; sc. B, Apt. 68, sector 1  
 Bukarest  
 Tel.: +(40) 213 185 614  
 Fax: +(40) 212 108 052  
 info@klaus-union.ro  
 www.klaus-union.ro

## (RUS) Russia

Klaus Union  
 Evgeny Gorochilin  
 Trofimova street, 18a  
 Trofimova street, 15 post box 60  
 Moscow 115432  
 Tel. / Fax: +(7) 495 679 409 0  
 gorochilin@klaus-union.ru  
 www.klaus-union.ru

## (S) Sweden

Hugo Tillquist AB  
 P.O.Box 1120  
 16422 Kista  
 Tel.: +(46) 859 463 200  
 Fax: +(46) 875 136 95  
 info@tillquist.com  
 www.tillquist.com

## (SK) Slovakian Republic

Sigmet spol s.r.o.  
 Kosmonautu c.p. 1085/6  
 77200 Olomouc  
 Tel.: +(420) 585 231 070  
 Fax: +(420) 585 227 072  
 sigmet@sigmet.cz  
 www.sigmet.cz

## (SLO) Slovenia

SLOTECH Branko Gabric s.p.  
 Kovaca vas 63  
 SI-2310 Slovenska Bistrica  
 Tel.: +(38) 624 614 460  
 Fax: +(38) 624 614 465  
 branko.gabric@amis.net  
 www.slotech.si

## (TR) Turkey

SPECK - Pompa  
 Sanayi ve Ticaret Ltd. Sti.  
 PK. 41 Suadiye  
 81072 İstanbul  
 Tel.: +(90) 216 387 894 0  
 Fax: +(90) 216 387 982 9  
 speck@speckpompa.com.tr  
 www.speckpompa.com.tr

## (NZ) New Zealand

MacEwans Pumping Systems Ltd.  
 19 Ride Way  
 North Harbour Industrial Estate  
 Tel: +(64) 941 548 60  
 Fax: +(64) 941 548 68  
 pumps-ak@macewans.co.nz  
 www.macewans.co.nz

## (RC) Taiwan

**Speck Pumpen Subsidiary**  
 SPECK Pumpenfabrik  
 Walter Speck KG Taiwan Branch  
 2Fl., no. 153, Sec. 2  
 Ta - Tung Rd., His Chi City  
 Taipei  
 Tel.: +(886) 286 926 220  
 Fax: +(886) 286 926 759  
 Mobile: +(886) 936 120 952  
 speck86@m32.hinet.net  
 www.speck-pumps.com.tw

## (RCH) Chile

W & F Ingenieria Y Maquinas S.A.  
 Felix de Amesti 90, Piso 6  
 Las Condes, Santiago  
 Tel: +(56) 220 629 43  
 Fax: +(56) 220 630 39  
 rwender@tie.cl

## (ROK) Corea

J.C. International Inc.  
 5F, Shinbo Bldg, 402-22  
 Seo-gu-Dong, Mapo-Gu,  
 Seoul  
 Tel.: +(82) 232 628 00  
 Fax: +(82) 232 628 04  
 jclee@jcint.co.kr  
 www.jcint.co.kr

## (SG) Singapore

Leesonmech  
 Engineering (M) Sdn. Bhd.  
 No. 56, Jalan Intan 3, Taman Intan,  
 86000 Kluang, Johor  
 Malaysia / Malaysia / Malaisie  
 Tel.: +(607) 777 105 5  
 Fax: +(607) 777 106 6  
 sales@leesonmech.com  
 www.leesonmech.com

## (T) Thailand

**Speck Pumpen Subsidiary**  
 Pump Systems Flux & Speck Co. Ltd.  
 181/4 Soi Anamai  
 Srinakarin Road  
 Suanluang Bangkok 10250  
 Tel: +(662) 320 256 7  
 Fax: +(662) 322 248 6  
 thienchai@fluxspeck.com  
 www.fluxspeck.com

## (USA) USA

SPECK Pumps  
 Pool Products  
 8125 Bayberry Road  
 Jacksonville, Florida 32256  
 Tel.: +(1) 904 739 262 6  
 Fax: +(1) 904 737 526 1  
 info.usa@speck-pumps.com  
 www.usa.speck-pumps.com

## (ZA) Rep. South Africa

SPECK Pumps South Africa (Pty) Ltd.  
 4 Bart Street Wilbart / Germiston  
 P.O. Box 15465  
 Hurleyvale 1611  
 Tel: +(27) 114 554 300  
 Fax: +(27) 114 556 996

Edition

**08/2009**

replaces edition 04/2009

## (D)

Produktion / Verwaltung  
 Production / Administration

Tel.: +(49) 9171 809-0  
 Fax: +(49) 9171 809-10  
 info@speck-pumps.de  
 www.speck-pumps.de

01\_10



Systemtechnik GmbH

Postfach 1453 · 91142 Roth / Germany  
Regensburger Ring 6-8 · 91154 Roth / Germany  
Tel.: +49 (91 71) 809 - 0  
Fax: +49 (91 71) 809 - 10  
E-Mail: [info@speck-pumps.de](mailto:info@speck-pumps.de)  
Internet: [www.speck-pumps.de](http://www.speck-pumps.de)