

1450 RPM

2900 RPM

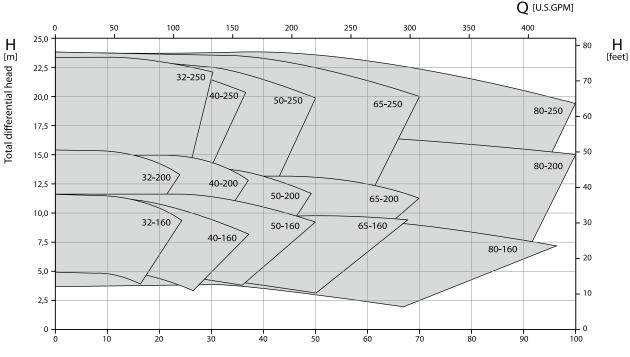

Flow rate **Q** [m³/h]

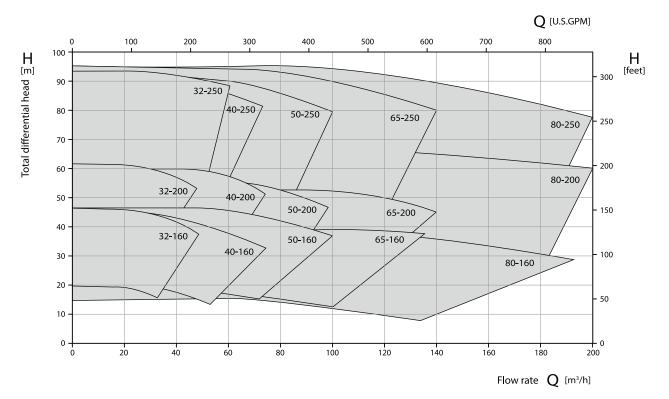

for handled Liquid with SG = 1000 kg/m 3 , Viscosity = MM 2 /s

50Hz Performance Curve

TOAMA

Heat Transfer Pumps
Heat transfer pumps with magnetic coupling

Shanley Pump & Equipment, Inc.


2525 S. Clearbrook Drive Arlington Heights, IL 60005 P: (847) 439-9388

F: (847) 439-9388 www.shanleypump.com



1750 RPM

3500 RPM

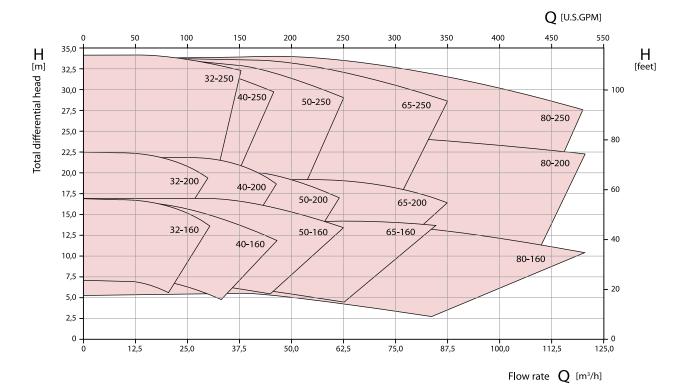

 \mathbf{Q} [U.S.GPM] 100 200 300 400 500 600 700 800 900 120 H [feet] Total differential head $\, \mathbb{E} \, \mathbf{T} \,$ 110 350 100 32-250 80-250/ 40-250 65-250 300 50-250 80 32-200 250 40-200 80-200 70 50-200 65-200 200 60 32-160 50-160 65-160 50 40-160 80-160 150 40 100 30 20 50 10 0 + 20 40 60 80 100 120 140 160 180 200 220 Flow rate Q [m³/h]

MEDI

Heat Transfer Pumps
Heat transfer pumps with magnetic coupling

60Hz Performance Curve

Shanley Pump & Equipment, Inc.

2525 S. Clearbrook Drive Arlington Heights, IL 60005 P: (847) 439-9200 F: (847) 439-9388

www.shanleypump.com



for handled Liquid with SG = 1000 kg/m³, Viscosity = MM²/s