




DIMENSIONS "TECNIUM" PUMP TYPE:

BNB

32-125



STANDARD	PUMP	BASE PLATE	MOTOR	FLANGES	SPEED RATING/r.p.m.
	DIN EN 22858 ISO 2858 NF E 44121	EN 23661 ISO 3661	NEMA-IP 55	ANSI 150 lbs.	$\frac{1.450}{1.740}$

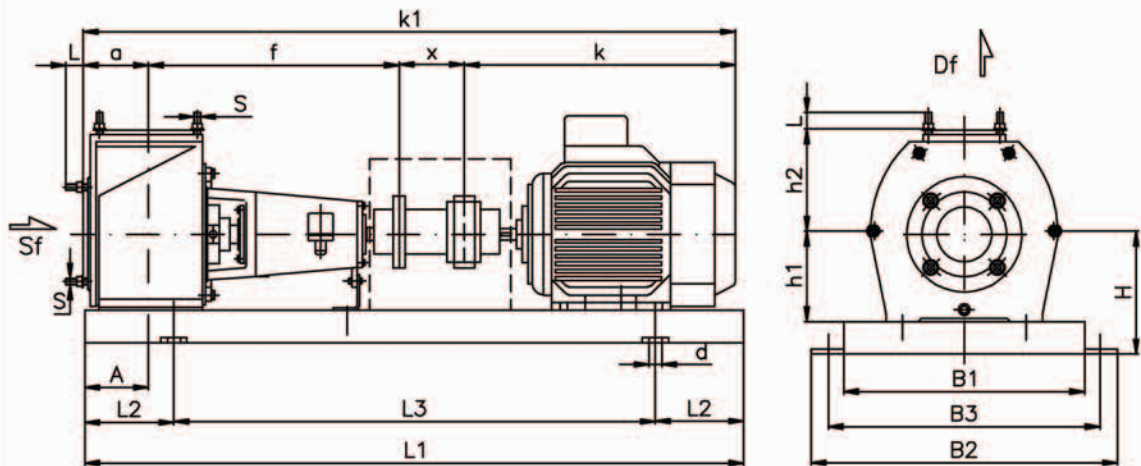

Pump type	Motor	Pump	Assembly	Base plate Socle N°2
	Tipo HP	a f h1 h2 H	L1 A B2 k k1 x	L3 L2 B3 B1 d
BNB 32-125	0.5	3.15 15.16 4.41 5.51 7.91	31.5 2.36 14.17 11.07 33.32 3.94	21.3 5.12 12.6 10.24 0.71

	Df	Sf	Discharge Df	Suction Sf	Coupling
DN	1-1/4"	2"			A1
D	4.63"	6"			
C	3.5"	4.75"			
U	2.5"	3.63"			
N°	4	4			
S	1/2"	5/8"			
L	2"	2"			
Loads in nozzles Traction $Df 1\frac{1}{4} = 157$ lb. $Sf 2" = 292$ lb. Moment $Df 1\frac{1}{4} = 8803$ lb.in $Sf 2" = 11444$ lb.in					
ITEM _____ ORDER N: _____ CLIENT: _____					

Weight (lbs.)				
Pump	99	Base plate	55	Motor
				10.34

Dimensions in inches

Ed. 05.07	TECNIUM®	Tech. Sheet 49015
-----------	----------	----------------------