

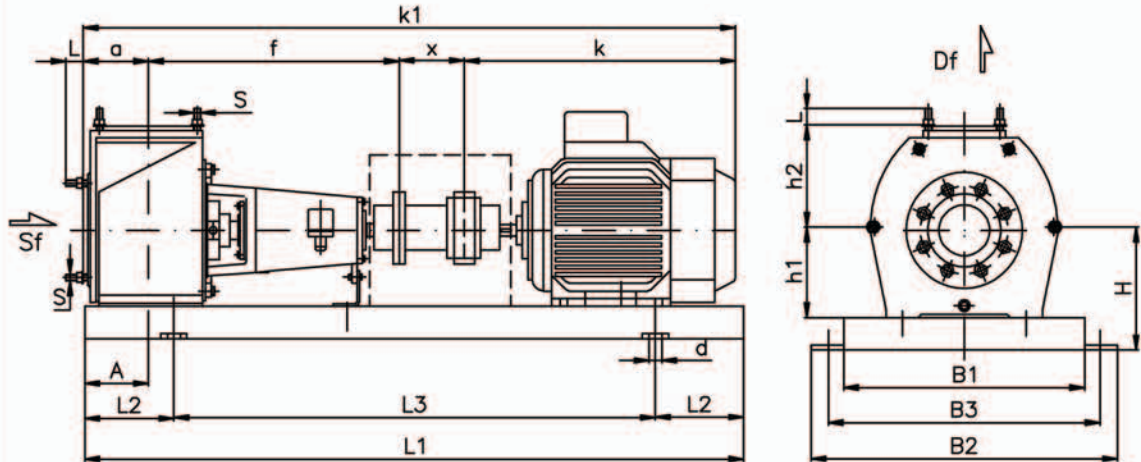


DIMENSIONS "TECNIUM" PUMP TYPE:



BNB
150-250



STANDARD	PUMP	BASE PLATE	MOTOR	FLANGES	SPEED RATING/r.p.m.
	DIN EN 22858 ISO 2858 NF E 44121	EN 23661 ISO 3661	NEMA-IP 55	ANSI 150 lbs.	$\frac{1.450}{1.740}$



Pump type	Motor	Pump		Assembly										Base plate				
	Tipo	HP	a	f	h1	h2	H	L1	A	B2	k	k1	x	L3	L2	B3	B1	d
BNB 150-250		100	6.3	20.87	11.02	14.76	17.32	70.9	3.54	28.7	36.3	70.56	7.09	42.24	11.8	26.4	23.62	1.06

	Df	Sf	Discharge Df	Suction Sf
DN	6"	8"		
D	11"	13.5"		
C	9.5"	11.75"		
U	8.5"	10.63"		
N°	8	8		
S	3/4"	3/4"		
L	3.31"	3.66"		
Loads in nozzles				
Traction			$\frac{Df\ 6''}{Sf\ 8''} = \frac{877}{1169}\text{ lb.}$	$\frac{Df\ 6''}{Sf\ 8''} = \frac{18487}{24649}\text{ lb.in}$
			Moment	

Coupling } A4

ITEM _____

ORDER N: _____

CLIENT: _____

Weight (lbs.)				
Pump	825	Base plate	286	Motor
				1166

Dimensions in inches

Ed. 05.07

TECNIUM®

Tech. Sheet
49256