




DIMENSIONS "TECNIUM" PUMP TYPE:

BNB
65-160



STANDARD	PUMP	BASE PLATE	MOTOR	FLANGES	SPEED RATING/r.p.m.
	DIN EN 22858 ISO 2858 NF E 44121	EN 23661 ISO 3661	NEMA-IP 55	ANSI 150 lbs.	$\frac{1.450}{1.740}$

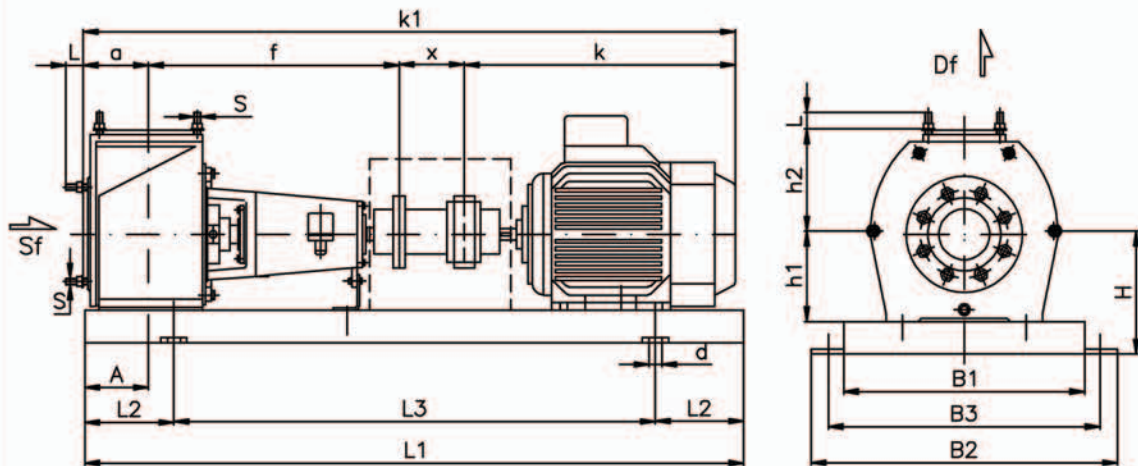

Pump type	Motor		Pump				Assembly							Base plate				
	Tipo	HP	a	f	h1	h2	H	L1	A	B2	k	k1	x	L3	L2	B3	B1	d
BNB 65-160		2	3.94	19.69	6.29	7.87	10.29	39.4	2.95	17.7	14.2	41.77	3.94	26	6.69	15.7	13.8	0.91

	Df	Sf	Discharge Df	Suction Sf	Coupling
DN	2-1/2"	4"			A1
D	7"	9"			
C	5.5"	7.5"			
U	4.28"	6.19"			
N°	4	8			
S	5/8"	5/8"			
L	1.97"	2.17"			

Loads in nozzles

Traction $\frac{Df 2 \frac{1}{2} = 360}{Sf 4" = 585}$ lb. Moment

$\frac{Df 2 \frac{1}{2} = 12765}{Sf 3" = 14965}$ lb.in

CLIENT: _____

Weight (lbs.)				
Pump	182.6	Base plate	88	Motor
				31.9

Dimensions in inches

Ed. 05.07	TECNIUM®	Tech. Sheet 49094
-----------	----------	----------------------